



# Jumbo Bloks

H+H Jumbo Bloks offer beneficial productivity, with as few as 6.3 blocks completing 1m<sup>2</sup> of walling. Their use with thin layer construction enhances the speed of build on site.



## Applications

- Internal and external leaf of cavity walls
- Separating walls (except Solar Grade)
- Flanking walls
- Partitions
- Multi-storey buildings



Jumbo Blok



# Jumbo Bloks

Face size	Jumbo Blok 630mm x 250mm	
Block Thickness (mm)	100	140
Solar Grade Weight (kg) <sup>†</sup>	9	13
Standard Grade Weight (kg) <sup>†</sup>	12	17
High Strength Grade Weight (kg) <sup>†</sup>	14	20
Super Strength Grade Weight (kg) <sup>†</sup>	14	20

	Solar Grade	Standard Grade	High Strength Grade	Super Strength Grade
Compressive Strength	2.9N/mm <sup>2</sup>	3.6N/mm <sup>2</sup>	7.3N/mm <sup>2</sup>	8.7N/mm <sup>2</sup>
Thermal Conductivity	0.11 W/mK	0.15 W/mK	0.18 W/mK	0.18 W/mK
Density	460 kg/m <sup>3</sup>	600 kg/m <sup>3</sup>	730 kg/m <sup>3</sup>	730 kg/m <sup>3</sup>

<sup>†</sup> Block weights at typical moisture content when laid. (Some manufacturers may quote weights which have not allowed for this.)

All shaded areas indicate that the product is a stock item. Other sizes can be made to order subject to minimum quantities.


## Pack Information

Block Thickness (mm) = T	75	100	140	150	200	215	275	300	355
Blocks/m <sup>2</sup> laid 6.28 (2mm joints)									
Coverage per pack (m <sup>2</sup> ) – 2mm joint	-	7.6	5.1	-	-	-	-	-	-
Number of blocks per pack	-	48	32	-	-	-	-	-	-
Pack width (mm) = W	-	1200	1120	-	-	-	-	-	-
Pack weight – Solar Grade (kg)*	-	440	410	-	-	-	-	-	-
Pack weight – Standard Grade (kg)	-	620	535	-	-	-	-	-	-
Pack weight – High Strength/Super Strength (kg)*	-	720	625	-	-	-	-	-	-

## Jumbo Bloks (630mm x 250mm)



250mm

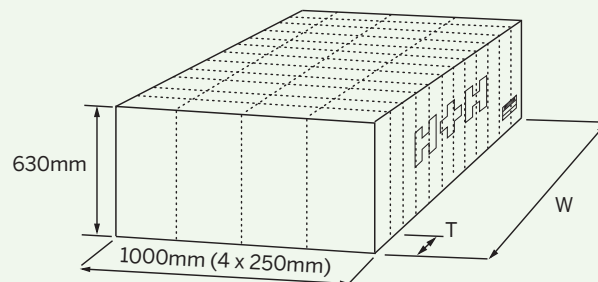

For further information and to check our most up-to-date product range, or to find your nearest stocking merchant, please visit our website [www.hhcelcon.co.uk](http://www.hhcelcon.co.uk) or contact the following departments:

### Sales

For sales enquiries or to find your local stockist please contact  
Tel: 01732 886444  
Fax: 01732 887013

### Technical

For technical enquiries please contact  
Tel: 01732 880580  
Fax: 01732 887013

H+H UK will always endeavour to reflect our product range and technical information as accurately as possible. We may however, need to update both from time to time during the life of this brochure. Please check with either our Sales or Technical departments to obtain the latest information prior to specification and purchase.

\* Pack weight excludes pallet.